


STONEBLAZER Marble & Granite

Exclusives application with natural look for marbles & Granites.

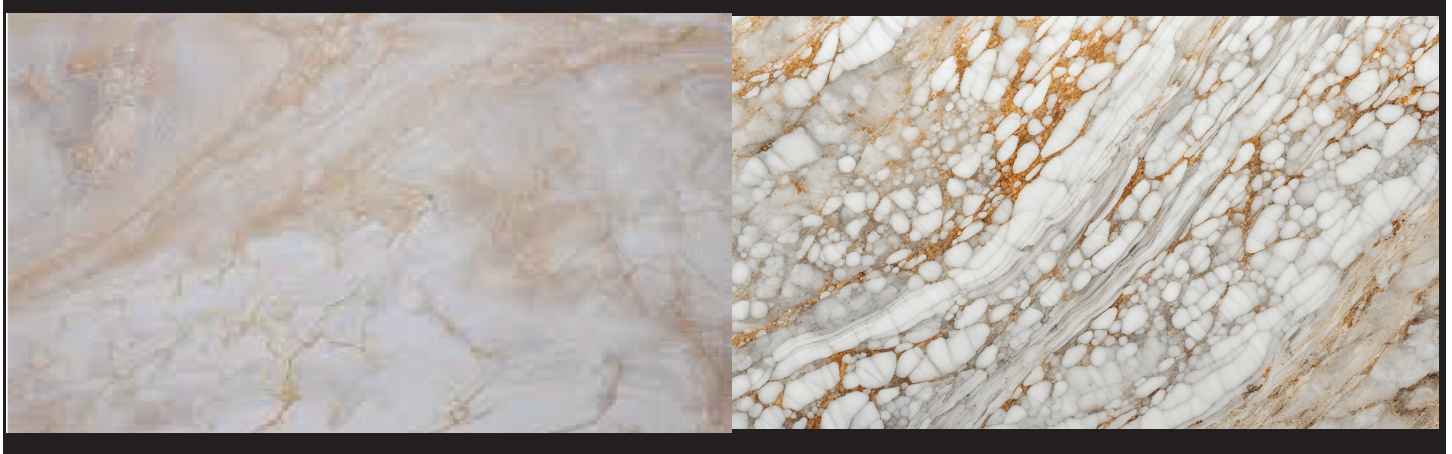

Product Description:

STONEBLAZER MARBLE & GRANITE is single pack solvent based application which provides easy to clean protection against water, oil or dirt along with water & Oil based stains without changing the surface appearance. At the same time, it does not affect vapour permeability and keeps it's natural touch of low to high porous natural stones e.g. marble, travertine, granite, unglazed ceramic tiles etc.

Application Areas

STONEBLAZER MARBLE & GRANITE is an ideal application for oil, water and dirt repellent treatment of low -porosity natural stone, e.g. marble, travertine and Treatment of floors & facades of natural or synthetic stone or unglazed ceramic tiles for easy care.

Treatment of window sills, table tops and kitchen work tops of natural or synthetic stone to avoid staining. Treatment of facades of natural or synthetic stone, concrete in order to allow easier removal of dirt, dust etc. from monuments, exterior and interior walls.

Benefits

- ⊙ **Ready to use.**
- ⊙ **Can be applied by brush, roller or spray.**
- ⊙ **Very thin liquid - deep penetration.**
- ⊙ **Maximum reduction of water uptake**
- ⊙ **Permeability to water vapour: breathability**
- ⊙ **Resistance to UV light, reduced efflorescence**
- ⊙ **Extensive penetration, adequate resistance to alkalis**
- ⊙ **NO ALGAE/FUNGUS:- Along with water it repels dirt/dust particles, results in protection of facades against growth of Algae /Fungus (Micro Organism)**
- ⊙ **No change in surface appearance**
- ⊙ **Long lasting effect, outstanding durability & protection**
- ⊙ **Reduced maintenance: cost saving**
- ⊙ **Environmental compatibility**

Typical Properties (Technical Characteristics)

Nature : Single pack	Very thin liquid
Appearance & Colour	Colourless
Clarity	Clear
Density	0.80 ± 0.02 gm / cc
Flash point	55°C
Penetration depth	2 - 4 mm

Direction for use:

Surface Preparation: The surface shall be free from oil, grease and dirt. If possible wash the surface with clean water after thorough brushing and allow the surface to dry for better penetration.

Because of possible discolouration, it is advisable to carry out tests area. This can also be used to check the efficiency of the product.

Mixing/ Primer Coat: No mixing needed as its ready to use single pack system.

Application process: Apply STONEBLAZER MARBLE & GRANITE liberally brushed or rolled onto substrate evenly. More the penetration more the life. Wipe off the excess material from the surface with clean lint free white cloth after 1 – 2 hours of application.

The hydrophobic & oleo phobic effects develop within 48 - 72 hours. Substrates treated with

STONEBLAZER MARBLE & GRANITE should be cleaned at once after contamination with grease/ paint, because paint in particular is very difficult to dissolve once the binder has fully hardened.

Cleaning: Clean the tools with white spirit, kerosene or xylene solvent.

Coverage

Highly porous surface - 50 - 150 Sq.Ft. per litre. Poor absorbent surface - 150 - 250 Sq.Ft. per litre.

Precautions

Do not dilute.

Do not apply on damp & wet substrate.

Packaging-

1 Litre, 5 litre & 20 Litre.

Storage & shelf life

Shelf life is one year from the date of manufacture. Store the material in cool and dry place away from sun heat.

WEATHERBLAZER INDIA PVT. LTD.

Plot No. 74, Income Tax Colony, Kotwal Nagar, Pratap Nagar,
Nagpur, Maharashtra 440022